

TW Series

HIGH TEMPERATURE, FOR 125°C USE

125°C 高温品




- Low impedance at high frequency
高頻低阻抗
- For electronic control units and other high temperature applications
適用於電子控制器與其他高溫應用
- Load life of 2000 hours at 125°C
在 125°C 環境中負荷壽命 2000 小時
- Comply with the RoHS & REACH
符合 RoHS 與 REACH

□ SPECIFICATIONS 特性表

Items 項目	Characteristics 主要特性	
Operation Temperature Range 使用溫度範圍	-40 ~ +125°C	
Voltage Range 額定工作電壓範圍	6.3 ~ 50V	63 ~ 250V
Capacitance Range 靜電容量範圍	1 ~ 15000µF	0.47 ~ 100µF
Capacitance Tolerance 靜電容量允許偏差	±20% at 120Hz, 20°C	
Leakage Current 漏電流	Leakage current ≤0.01CV or 3µA, whichever is greater (after 2 minutes application of rated voltage at 20°C) 漏電流 ≤0.01CV 或 3µA 取較大值(在 20°C 環境中施加額定工作電壓 2 分鐘後)	Leakage current ≤0.02CV + 15µA (after 5 minutes application of rated voltage at 20°C) 漏電流 ≤0.02CV + 15µA(在 20°C 環境中施加額定工作電壓 5 分鐘後)
Dissipation Factor (tan δ) 損耗角正切	C: Nominal capacitance (µF) 標稱靜電容量, V: Rated voltage (V) 額定電壓	
	When nominal capacitance is over 1000µF, tan δ shall be added 0.02 to the listed value with increase of every 1000µF. 當標稱靜電容量大於 1000µF, 其標稱靜電容量每增加 1000µF, 損耗角正切增加 0.02. Measurement frequency 測試頻率: 120Hz, Temperature 溫度: 20°C	
Stability at Low Temperature 低溫特性	Rated Voltage (V) 額定工作電壓	6.3 10 16 25 35 50 63~100 160~250
	Impedance Ratio 阻抗比	Z(-25°C) / Z(20°C) 3 Z(-40°C) / Z(20°C) 5
Load Life 高溫負荷特性	After 2000 hours application of the rated voltage at 125°C, they meet the characteristics listed below. 在 125°C 環境中施加額定工作電壓 2000 小時後, 電容器的特性符合下表的要求。 (Ø5, Ø6.3 and WV≥100 products are for 1000 hours) (Ø5, Ø6.3 和 WV≥100 產品為 1000 小時)	
	Capacitance Change 靜電容量變化率	Within ±20% of initial measured value 初始值的±20%以內
Shelf Life 高溫貯存特性	Dissipation Factor 損耗角正切	≤300% of initial specified value 不大於規範值的 300%
	Leakage Current 漏電流	≤initial specified value 不大於規範值
Marking 標識	Printed with white colour on black sleeve (PVC) or printed with white colour on green sleeve (PET). 黑色膠管白字印刷 (PVC) 或綠色膠管白字印刷 (PET).	

□ DRAWING 外形圖 (Unit: mm)

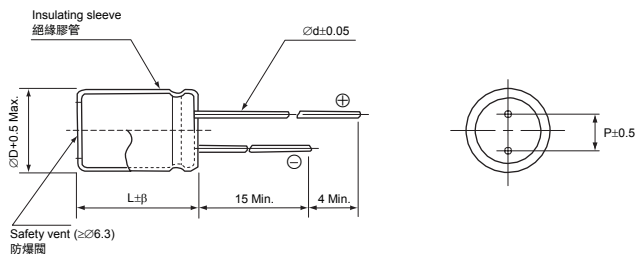

ØD	5	6.3	8 (L≤11.5)	8 (L≥16)	10	13	16	18
P	2.0	2.5	3.5		5.0		7.5	
Ød	0.5			0.6			0.8	
β	1.5				2.0			

□ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 紋波電流頻率補償係數

Cap.(µF) 容量	Frequency 頻率	120Hz	300Hz	1KHz	10KHz	100KHz
1000 > CV		0.50	0.64	0.83	0.90	1.0
1000 ≤ CV		0.67	0.79	0.91	0.95	1.0

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5~10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced. 鋁電解電容器在疊加紋波電流後會引起發熱, 溫度每上升 5~10°C 壽命會減半。若要保持長壽命性能, 請在使用過程中適當降低紋波電流。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考, 任何修改不作預先通知。如果在使用上有疑問, 請在採購前與我們聯繫, 以便提供技術上的協助。

CAT.2019/V4

TW Series

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE 規格尺寸及最大允許紋波電流及阻抗值

WV		6.3 (0J)			10 (1A)			16 (1C)		
Parameter 參數 μF	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	
										Parameter 參數
47	470						5 × 11	1.0	24	
68	680			5 × 11	1.0	124	6.3 × 11.5	0.65	176	
100	101	5 × 11	1.1	120	63. × 11.5	0.71	168	6.3 × 11.5	0.45	212
150	151	6.3 × 11.5	0.64	180	6.3 × 11.5	0.45	212	8 × 11.5	0.30	310
220	221	6.3 × 11.5	0.39	228	8 × 11.5	0.31	310	8 × 11.5	0.21	368
330	331	8 × 11.5	0.26	234	8 × 11.5	0.21	368	10 × 12.5	0.16	500
470	471	10 × 12.5	0.18	460	10 × 12.5	0.17	480	10 × 16	0.12	616
680	681	10 × 16	0.14	560	10 × 16	0.12	616	10 × 20	0.085	816
1000	102	10 × 20	0.097	760	10 × 20	0.078	848	13 × 21	0.061	1129
1500	152	10 × 25	0.071	976	13 × 21	0.059	1134	13 × 25	0.047	1328
2200	222	13 × 21	0.056	1150	13 × 25	0.044	1368	16 × 20	0.043	1440
3300	332	13 × 25	0.044	1368	16 × 20	0.040	1480	16 × 25	0.035	1676
4700	472	16 × 25	0.042	1548	16 × 31.5	0.030	1936	16 × 35.5	0.026	2144
6800	682	16 × 31.5	0.031	1896	16 × 35.5	0.026	2144	18 × 35.5	0.023	2320
10000	103	16 × 40	0.026	2200	18 × 40	0.022	2432			
15000	153	18 × 40	0.023	2368						

WV		25 (1E)			35 (1V)			50 (1H)		
Parameter 參數 μF	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Impedance (Ω) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 125°C, 100KHz 紋波電流	
										Parameter 參數
1	010						5 × 11	5.2	29	
1.5	1R5						5 × 11	4.9	36	
2.2	2R2						5 × 11	4.5	43	
3.3	3R3						5 × 11	3.9	53	
4.7	4R7						5 × 11	2.9	65	
6.8	6R8						5 × 11	2.3	73	
10	100						5 × 11	1.8	92	
15	150						5 × 11	1.2	116	
22	220			5 × 11	0.97	128	6.3 × 11.5	0.84	156	
33	330	5 × 11	1.0	124	6.3 × 11.5	0.64	180	6.3 × 11.5	0.56	192
47	470	6.3 × 11.5	0.72	168	6.3 × 11.5	0.44	216	8 × 11.5	0.39	275
68	680	6.3 × 11.5	0.47	208	8 × 11.5	0.31	307	8 × 11.5	0.26	328
100	101	8 × 11.5	0.31	306	8 × 11.5	0.21	368	10 × 16	0.21	465
150	151	8 × 11.5	0.21	368	10 × 12.5	0.16	500	10 × 20	0.13	656
220	221	10 × 12.5	0.17	480	10 × 16	0.12	616	10 × 25	0.098	832
330	331	10 × 16	0.12	600	10 × 20	0.078	848	13 × 21	0.072	1025
470	471	10 × 20	0.084	816	13 × 21	0.060	1121	13 × 25	0.057	1200
680	681	13 × 21	0.060	1114	13 × 25	0.047	1328	16 × 20	0.052	1304
1000	102	13 × 25	0.047	1328	16 × 20	0.044	1416	16 × 31.5	0.039	1696
1500	152	16 × 20	0.044	1416	16 × 31.5	0.036	1908	16 × 40	0.034	1928
2200	222	16 × 25	0.036	1641	16 × 35.5	0.026	2144	18 × 40	0.031	2048
3300	332	16 × 35.5	0.026	2144	18 × 40	0.022	2432			
4700	472	18 × 40	0.023	2368						

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V4

TW Series

□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE 規格尺寸及最大允許紋波電流及阻抗值

WV		63 (1J)		100 (2A)		160 (2C)	
Parameter 參數	μF	Case size ØD×L (mm) 尺寸	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Ripple current (mA rms) 125°C, 100KHz 紋波電流
		0.47	R47	8 × 11.5	13	8 × 11.5	13
1	010	8 × 11.5	19	8 × 11.5	19	10 × 12.5	15
2.2	2R2	8 × 11.5	28	10 × 12.5	33	10 × 16	24
3.3	3R3	8 × 11.5	34	10 × 16	44	10 × 16	32
4.7	4R7	8 × 11.5	41	10 × 16	52	10 × 20	38
10	100	8 × 11.5	61	10 × 20	83	13 × 21	66
22	220	10 × 16	113	13 × 25	157	16 × 25	118
33	330	10 × 20	151	16 × 25	214	16 × 31.5	158
47	470	13 × 21	211	16 × 31.5	279		
100	101	13 × 25	336				

WV		200 (2D)		250 (2E)	
Parameter 參數	μF	Case size ØD×L (mm) 尺寸	Ripple current (mA rms) 125°C, 100KHz 紋波電流	Case size ØD×L (mm) 尺寸	Ripple current (mA rms) 125°C, 100KHz 紋波電流
		0.47	R47	10 × 12.5	10
1	010	10 × 12.5	15	10 × 12.5	14
2.2	2R2	10 × 16	24	10 × 16	24
3.3	3R3	10 × 20	32	10 × 20	32
4.7	4R7	10 × 20	38	13 × 21	45
10	100	13 × 21	72	16 × 25	79
22	220	16 × 31.5	129		

- Please refer to page 19 "Taping Specifications" & page 21 "Lead Forming & Cutting" about the taped or formed product spec. 編帶與引線成型標準請查閱第 19 頁 "編帶標準" 及第 21 頁 "引線成型與剪腳"。
- Please refer to page 20 "Packaging Specifications" for the minimum package quantity. 最小包裝數量請查閱第 20 頁 "包裝標準"。
- Please refer to page 16 for the Part Number System. 產品編碼規則請查閱第 16 頁。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V4