


# EXPLANATION OF PART NUMBERS 產品編碼規則

□ For Conductive Polymer Aluminum Solid Electrolytic Capacitors 適用於導電性高分子固態鋁電解電容器

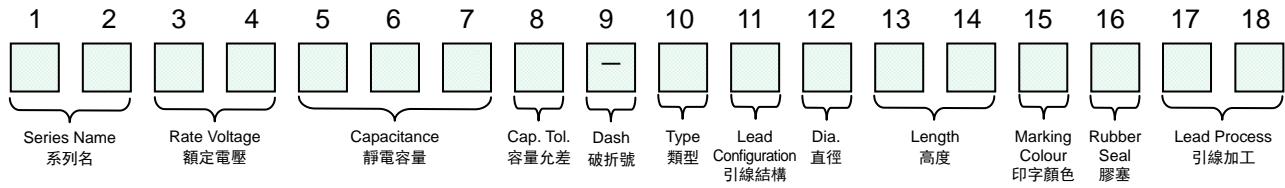

(1, 2)		(3, 4)		(5-7)		(8)		(10)		(12)		(13, 14)	
Series 系列	Code 代碼	Voltage (W.V.) 電壓	Code 代碼	Capacitance (μF) 靜電容量	Code 代碼	Cap. Tolerance (%) 容量允差	Code 代碼	Type 類型	Code 代碼	Diameter (∅) 直徑	Code 代碼	Length (mm) 高度	Code 代碼
MA	0E	2.5	0E	3.3	3R3	+20 -20	M	Chip 貼片	C	4	C	5.5	55
MB	0G	4	0G	4.7	4R7			Radial 引線	R	5	D	5.8	58
MR	0J	6.3	0J	6.8	6R8			Radial Taping 引線編帶	T	6.3	E	6	06
MS	1A	10	1A	10	100					8	F	6.7	67
MX	1C	16	1C	15	150					10	G	7	07
MV	1D	20	1D	22	220							7.7	77
PA	1E	25	1E	33	330							8	08
PB	1V	35	1V	39	390							9	09
PR	1G	40	1G	47	470							10(10.5)	10
PS	1H	50	1H	56	560							10.2	1S
PX	1J	63	1J	68	680							11	11
PV	1T	75	1T	82	820							12(12.5)	12
	1K	80	1K	100	101							12.7	1T
	1R	85	1R	150	151							13	13
	2A	100	2A	220	221								
	2B	125	2B	270	271								
				330	331								
				390	391								
				470	471								
				680	681								
				820	821								
				1000	102								
				1200	122								
				1500	152								
				1800	182								
				2200	222								
				2700	272								

(11)	
Type 類型	Lead Configuration 引線結構
Chip 貼片	Taping & Reel 編帶與卷盤
Radial 引線	Bulk 散裝
	Taping (Straight) 編帶(直腳)
	Lead Cutting 剪腳

(15)	
Marking Colour 印字顏色	Code 代碼
Black print on the case top 鋁殼頂部黑字印刷	S
Navy Blue print on the case top 鋁殼頂部深藍字印刷	B
Red print on the case top 鋁殼頂部紅字印刷	R

(16)	
Rubber Seal 膠塞	Code 代碼
Flat 平台	P
Stand-off 凸台	T

(17, 18)	
Lead Process 引線加工	Code 代碼
Standard 標準	00
Lead length after cut is 3mm 剪腳腳長 3mm	30
Lead length after cut is 4.5mm 剪腳腳長 4.5mm	45
Lead length after cut is 5mm 剪腳腳長 5mm	50
Lead length after cut is 7.5mm 剪腳腳長 7.5mm	75
Lead length after cut is 10mm 剪腳腳長 10mm	1A
Lead length after cut is 12mm 剪腳腳長 12mm	1B
Lead length after cut is 13mm 剪腳腳長 13mm	1C
Lead length after cut is 15mm 剪腳腳長 15mm	1D

● Note: The part number of Chip Type Conductive Polymer Aluminum Solid Electrolytic Capacitors is indicated with 1~14 digits.  
 ● 注：貼片式導電性高分子固態鋁電解電容器的產品編碼只需使用 1~14 位代碼。